


Printing pouching

HST-1 (LCF) T095

Structure

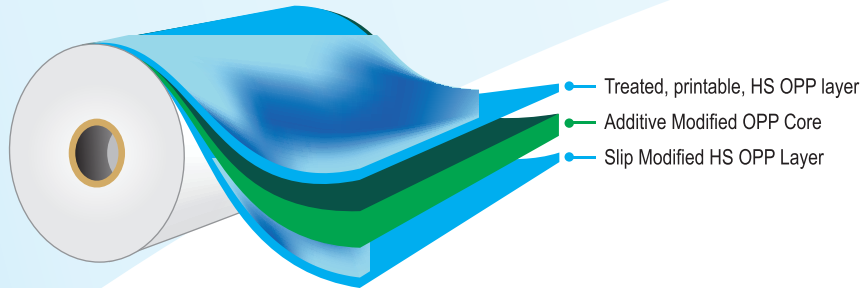

Typical Values

Properties	Ref.	Units	Astm # / Test Method	HST-1 (LCF) T095							
Physical Data											
Average Thickness		micron	D-374-C	15	17	18	20	25	30	35	40
		gauge		59.06	66.92	70.87	78.74	98.42	118.11	137.80	157.48
		mils		0.59	0.67	0.71	0.79	0.98	1.18	1.38	1.57
Thickness Variation		% (±)		3							
Density		g/cc		0.905							
Average Substance		g/m ²		13.58	15.38	16.29	18.1	22.63	27.15	31.68	36.2
Wettability (min.)		dynes/cm	D-2578	38							
Kinetic COF	UT-UT		D-1894	0.2 – 0.3							
Yield		m ² /Kg	D-4321	73.66	65.01	61.39	55.24	44.20	36.83	31.57	27.62
Optical Data											
Gloss (45 °)		gardner	D-2457	88 - 92				86 - 90			
Haze		%	D-1003	1.5 – 2.5				1.7 – 2.7			
Mechanical Data											
Tensile Strength	MD	kg/ cm ²	D-882	1200 - 1500							
	TD			2400 – 2800							
Elongation	MD	%	D-882	150 - 200							
	TD			30 - 80							
Thermal Data											
Shrinkage (120 °C, 5 min.)	MD	%	D-1204	2.5 – 4.5							
	TD			0.5 – 2.5							
Seal Initiation Temp.		°C	CTM	95							
Heat Seal Strength		g/25 mm	CTM	350	400	400	450	500	525	550	575
Barrier Data											
MVTR (38°C, 90%RH)		g/m2/day	F-1249	8	7	7	6	4.5	4	3.5	3

Description

It is a co-extruded, both side heat sealable and one side treated Bi-axially Oriented Polypropylene film

Features

- Excellent machinability
- Good ink adhesion
- High heat seal strength
- Good optical properties
- Seals at low temperature, hence broader heat seal temperature range
- Low COF throughout printing & laminating process

Applications

- General purpose printing, pouching of snacks, bakery products
- As a component in multi-layer laminate for VFFS & HFFS application
- Strip packaging for cough drops

CTM : Cosmo Test Method MD : Machine Direction TD : Transverse Direction

Disclaimer: The information provided above is based on COSMO FILMS LTD's conclusive tests, which are indicative only and provided as guidelines. They do not constitute a guarantee of any specific product attributes or the suitability of products for specific applications.

Cosmo Films Limited

B-14/8-9, MIDC, Waluj, Aurangabad 431136 (MS) India. T : +91 240 2554611-14 E : info.abad@cosmofilms.com
 Corp. Office : 1008, DLF Tower - A, Jasola District Center, New Delhi 110 025 India. T : +91 11 4949 4949 / 34 E : info.del@cosmofilms.com